


M S 8 4 P

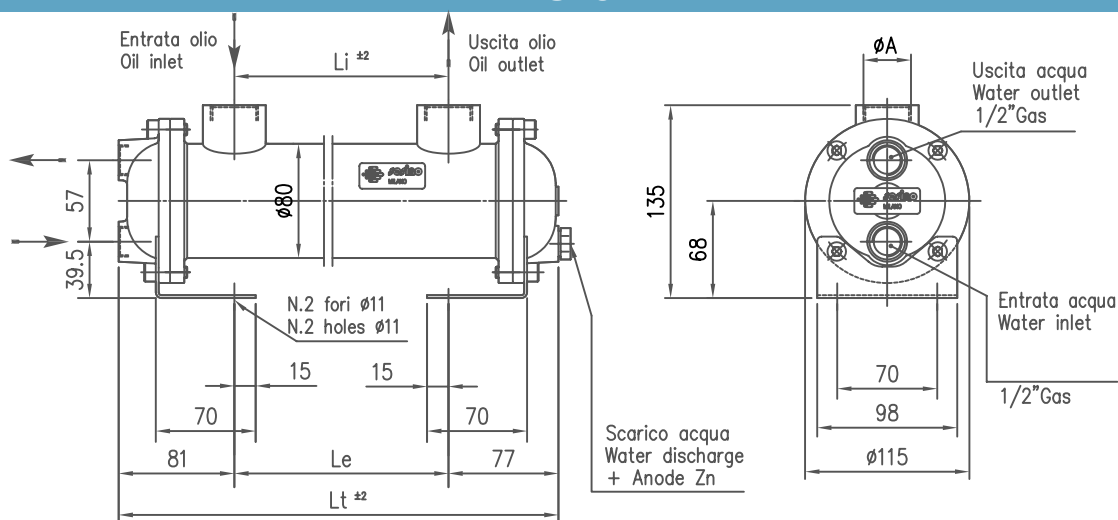

Guarnizioni di tenuta sulle testate: OR Ø 78x2,5 - Seal rings: = OR Ø 78x2,5 - Joints d'étanchéité = OR Ø 78x2,5 - Dichtungen an den Kopfenden = OR Ø 78x2,5

Tipo Type Typ Typ	Portata d'olio Oil flow Öldurchfluß Débit d'huile	kW dissipati con olio kW dissipated with oil Mit Ölzerstreute kW kW dissipés par huile	Peso Weight Gewicht Poids	Dimensioni Dimensions Abmessungen Dimensions			
	l/min	= 50°C, 46 cSt, H2O= 15°C	kg	Ø A	Li	Le	Lt
MS 84 P1	30 - 80	4 - 4,5	4,5	1" gas	150	150	308
MS 84 P2	20 - 60	7 - 8	6,3	1" gas	310	310	468
MS 84 P3	50 - 100	7 - 8	6,5	1 1/2" gas	310	320	478
MS 84 P4	30 - 80	14 - 16	9	1" gas	560	560	718
MS 84 P5	80 - 130	14 - 16	9	1 1/2" gas	560	570	728
MS 84 P6	40 - 90	17 - 20	10,8	1 1/2" gas	715	725	883
MS 84 P7	100 - 160	17 - 20	10,8	1 1/2" gas	715	725	883
MS 84 P8	60 - 110	20 - 23	12,3	1 1/2" gas	870	880	1038
MS 84 P9	140 - 190	20 - 23	12,3	1 1/2" gas	870	880	1038

Le dimensioni e le caratteristiche tecniche non sono impegnative. Overall dimensions and technical characteristics are not binding.
Abmessungen und technische Daten sind unverbindlich. Les dimensions et les caractéristiques techniques ne sont pas engageantes.

DIAGRAMMA DI RENDIMENTO
PERFORMANCE DIAGRAM
LEISTUNGSSCHAUBILD
DIAGRAMME DE RENDEMENT


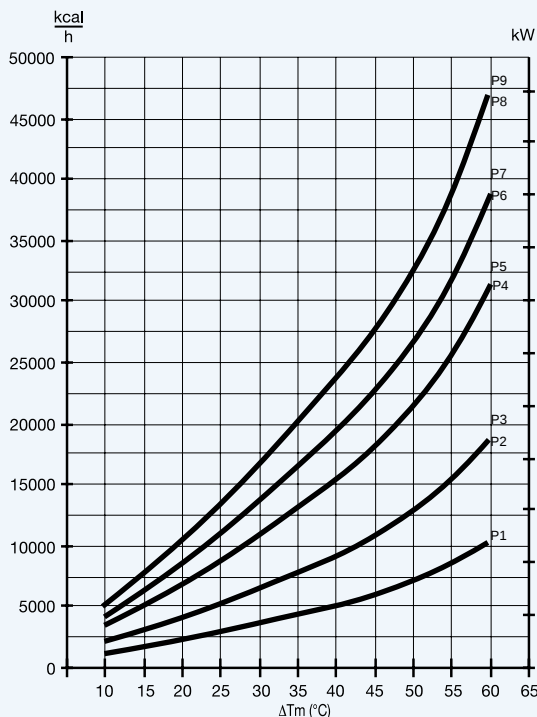


DIAGRAMMA PERDITE DI CARICO
LOSS OF PRESSURE DIAGRAM
DRUCKUERLUSTSCHAUßBILD
DIAGRAMME DES PERTES DE CHARGE

Fattore di correzione-Correction factor
Korrekturfaktor-Facteur de correction

cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6

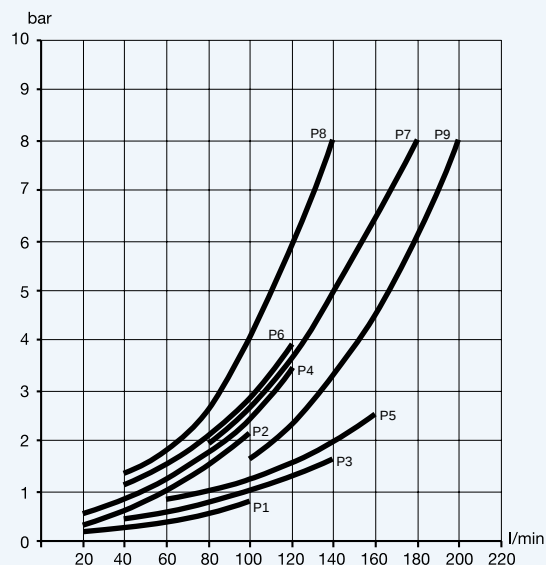

COSTANTE SESINO S.p.A. - Cap. Soc. € 1.000.000 i.v.

Sede: 20060 Gessate (MI) Italy - Via Monza, 150 A/B - Tel. +39 02 95380334 - Fax +39 02 95780528
Part. IVA IT 00750930158 - R.E.A. MI 297060 - R.I. MI 43392/1555/1885 - N. Meccanografico MI 011318
<http://www.sesino.com> - info@sesino.com